

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 76.0 mm
- Effective Area (A_e): 58.1mm²
- Effective Area (A_{Min}): 58.1mm²
- Effective Volume (V_e): 4420mm³

Approximate weight : 29.0g/pc




T3109 OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 ±20%	1900+30%/-20%	CF196T3109
CF139	2100 ±20%	2000+30%/-20%	CF139T3109
CF130	3000 ±20%	2850+30%/-20%	CF130T3109
CF195A	5000 ±20%	4800+30%/-20%	CF195AT3109
CF265	5000 ±20%	4800+30%/-20%	CF265T3109
CF190	6000 ±20%	5800+30%/-20%	CF190T3109
CF197	7000 ±20%	6700+30%/-20%	CF197T3109

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	31.5	32.5	30.5
B	19.0	19.6	18.4
C	9.5	9.9	9.1

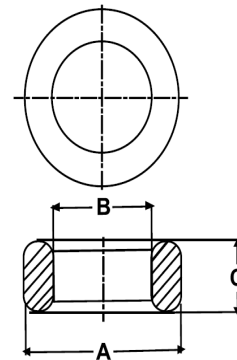

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf

Regd. Office & Works: Jabli, Distt. Solan, Himachal Pradesh – 173 209 (India)

Tel: +91 1792 277231/32/36, Fax: +91 1792 277234

E-mail: sales@cosmoferrites.com