

Bluetooth Serial Adapter, Parani™ SD1100



Features


- Provides transparent RS422/485 serial cable replacement
- Bluetooth Specification v2.0 + EDR
- Supports up to 4 multiple simultaneous connections
- Basic Transmit Power: Max. +18dBm, EDR Transmit Power: Max. +6dBm
- Receiving Sensitivity: -88dBm(0.1%BER)
- Supports Bluetooth profiles SPP(Serial Port Profile)
- Interoperability with PDA, laptops etc.
- Supports firmware upgrade via windows-based software (ParaniUpdater)
- Working distance (In an open field): Nom. 100 meters, up to 400m using 5dipole antenna
- Easy to use Windows configuration tool available.
- No external drivers required.

The Parani-SD1100 is a Class1 type of Bluetooth Serial Adapter that supports 100 meters of wireless transmit distance by default. The Parani-SD1100 has an extension option so that users can extend the transmit distance up to 400 meters using 5 dipole antennas. It supports Bluetooth v2.0+EDR specification. The Parani-SD1100 also supports up to 4 multiple simultaneous connections.

Typical application areas of the Parani-SD1100 include:

- RS422/485 Cable Replacement
- Truck/Bus Monitoring System
- Car Diagnostics
- Wireless POS System
- Wireless Machine(Healthcare/Industrial) Monitoring
- Wireless Factory Monitoring
- PLC Programming
- Wireless Printing
- Wireless Logistics

Panel Layout

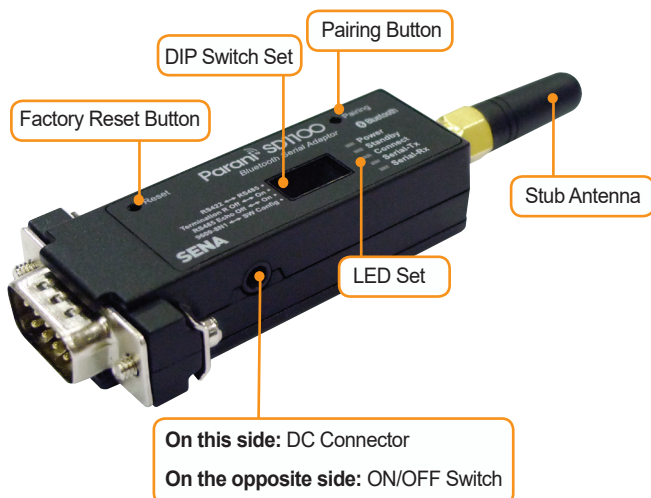

Specifications

Serial Interface

- Serial speed up to 921.6kbps
- RS422: TXD+, TXD-, RXD+, RXD-
- RS485: TRXD+, TRXD-

Bluetooth Interface

- Bluetooth v2.0 + EDR
- Class 1
- Profiles - SPP
- Working distance (in open field)

SAT-G01R	- SAT-G01R	100 meters
SAT-G01R	- DAT-G01R	150 meters
DAT-G01R	- DAT-G01R	200 meters
DAT-G01R	- DAT5-G01R	300 meters
DAT5-G01R	- DAT5-G01R	400 meters

[Antennas]

- SAT-G01R: +1dBi Stub Antenna
- DAT-G01R: +3dBi Dipole Antenna
- DAT5-G01R: +5dBi Dipole Antenna

Max. Tx power: +18dBm

Receive Sensitivity: -88dBm

Configuration

- ParaniWin, ParaniUpdater
- Modem AT command set

Diagnostic LED

- Power
- Standby
- Connect
- Serial-Tx
- Serial-Rx

Power

- Power input: 5~12VDC
- Power Consumption: Minimum 2mA, Maximum 80mA
- Common Power supply options
 - Power via a standard AC-plug DC-adaptor
 - Power via USB power cable
 - Power via DC power cable
 - Power via Pin 1 and Pin 6 of DB Connector

Environmental

- Operating temperature: -40°C to 85°C
- Storage temperature: -40°C to 85°C
- Humidity: 90% Non-condensing

Physical properties

- Dimension (L x W x H)
 - 76 x 31 x 16 (mm)
- Weight
 - 24g

Certification

- FCC, CE, KCC, TELEC, Bluetooth SIG

Warranty

- 3-year limited warranty

Ordering Information

Single Pack SD1100-A1 Includes

※ Stub antenna NOT included

- SD1100: SD1100 Bluetooth-serial adapter

Single Pack SD1100-00 Includes

- SD1100: SD1100 Bluetooth-serial adapter
- DPA-G01: Parani-DPA DC power cable for SD series
- UPA-G01: Parani-UPA USB Power Cable
- SAT-G01R: 1 dBi Stub Antenna - RP-SMA Plug Right-hand Thread
- DB9FTB-G01: DB9 Male to TerminalBlock Adapter

Single Pack SD1100-01 Includes

- Single pack SD1100-00
- OPA-G01: Parani-OPA External Power Adaptor - Includes one of four (EU, America, UK, Australia) regional power plugs
- DB9FTB-G01: DB9 Male to TerminalBlock Adapter

Bulk Pack SD1100-B10 Includes

- SD1100(×10EA): SD1100 Bluetooth-serial adapter
- SAT-G01R(×10EA): 1 dBi Stub Antenna - RP-SMA Plug Right-hand Thread
- DPA-G01(×10EA): Parani-DPA DC power cable for SD series

Optional Accessories

- SAT-G01R: 1 dBi Stub Antenna - RP-SMA Plug Right-hand Thread
- DPA-G01: Parani-DPA DC power cable for SD series
- UPA-G01: Parani-UPA USB Power Cable
- OPA-G01: Parani-OPA External Power Adaptor - Includes one of four (EU, America, UK, Australia) regional power plugs
- DAT-G01R: 3 dBi Dipole Antenna - RP-SMA Plug Right-hand Thread
- DAT5-G01R: 5 dBi Dipole Antenna - RP-SMA Plug Right-hand Thread
- SEC-G01R: 15cm Extension Cable(For SAT-G01R / DAT-G01R / DAT5-G01R)
- DB9FTB-G01: DB9 Male to TerminalBlock Adapter
- LTC100PC: LTC100PC RS232-RS422/485 converter for Parani-SD1100, port-powered, DC power supply optional

For more information,
 please visit us at <http://www.senanetworks.com>